BILL TO: JCS Inventory

SHIP TO: JCS Inventory

Stock#: 18-5585

Jamaica Cottage Shop Inc.
Voice 802-297-3760
FAX 802-297-2825
170 Winhall Station Rd
S Londonderry, VT 05155
design@jamaicacottageshop.com

INVOICE #	DESIGNER	DEPOSIT DATE	SHIP DATE	OFFER CODE
201805-5585	K Fleck	5/10/2018		JCS INVENTORY
CUSTOMER #	**APPROVED BY**	**BALANCE PAID DATE**	**SHIP VIA**	**COMMISSION**
JCS	**kmf**		**In House**	**JCS**

QUANTITY	DESCRIPTION	UNIT PRICE	AMOUNT
1	Fully Assembled 4x10 Weekender		-
	JCS INVENTORY		-
2	Skids: 4x6 Hemlock		-
	Recommended Foundation: 3"-4" Crushed Gravel		-
	Floor Joists: 2x6 rough sawn Hemlock; 24" on center		-
	Floor System Rating: 25 lbs/ sq. ft.		-
	Flooring Material: Woodbin Side: 1" rough sawn Hemlock Square Edge Board		-
	Flooring Material: Enclosed Storage Side: 3/4" CDX Plywood		-
	Wall Frame: 4x4 Hemlock Post & Beam		-
	Rafters: 2x6 rough sawn Hemlock; 24" on center		-
	Siding: Woodbin Side: 1" rough sawn Pine Board		-
	Siding: Enclosed Storage Side: 1" rough sawn Pine Board & Batten		-
	UPGRADE Roofing: Corrugated: CHARCOAL		-
	10" Front Roof Overhang		-
1	Single 3'0" JCS-built rough sawn Pine Door; No Ramp		-
	4' Full Partition between Woodbin & Enclosed Storage		-
			-
			-
			-
	Production Notes:		-
	Upgrade Roofing to CHARCOAL		-
			-
			-
			-
			-
	Delivery Installation:		-
	Building Rests on (6) points: (6) 4x8x16" solid concrete blocks supplied by driver.		-
	If additional blocks are requested or required to level the building due to improper, unlevel		-
	site preparation, additional blocks used will be charged at $10/ea (due on delivery).		-

SUBTOTAL	$ -
DISCOUNT	
SHIPPING & HANDLING	
DIESEL SURCHARGE	
SUBTOTAL	
TAX RATE	
SALES TAX	
JCS REASSEMBLY	
TOTAL	
DEPOSIT RECEIVED	
BALANCE DUE	
PAYMENT METHOD	

INVOICE
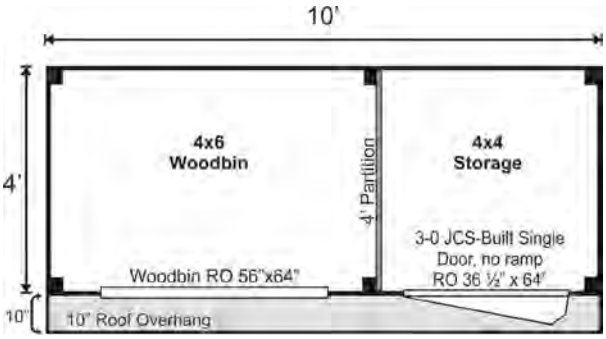
Deposit places order; Balance Due on Shipping
Estimated time frame is calculated from the date of your order confirmation.
Cash, Check, PayPal, Visa, MasterCard, Discover, & Amex accepted. Once building plans are set, there is a $250 fee for discussing changes, $125/hour per man plus material. Your order is fully refundable if cancelled within ***3 days***. Otherwise all of your deposit will be refunded except 25% of the total building cost. All cancelled or returned orders will be subject to a processing charge of 3%. Please allow an estimated 10 business days for processing. Standard cancellation policies will remain in effect for buildings on hold. While all information and prices is deemed accurate, Jamaica Cottage Shop, Inc. has the right to refuse or cancel any orders placed containing incorrect amounts due to typographical errors or incorrect prices. We are under no obligation to accept an order for which the price was posted incorrectly.
Pictures may be of client-modified projects and do not depict standard designs – pics may reflect windows, doors, siding, hardware, etc not included in the standard design. Please refer to the spec sheet online for details on the design's standard specifications. This building remains the property of Jamaica Cottage Shop until it is paid in full to the satisfaction of the Company.
The site and truck path are to be cleared of any unnecessary obstacles. JCS allows a 3 hour window for delivery; anything over 3 hours is subject to a charge of $250/hr billed in 15-minute increments. Additional shipping fees may apply for bridge crossings, ferries, and extreme urban or rural areas. To learn more about our delivery and site prep policy, please review our FAQ's on our website.
Thank you for your interest in Jamaica Cottage Shop, Inc. Your business is appreciated.
Please contact us if you have any questions or concerns.
www.JamaicaCottageShop.com